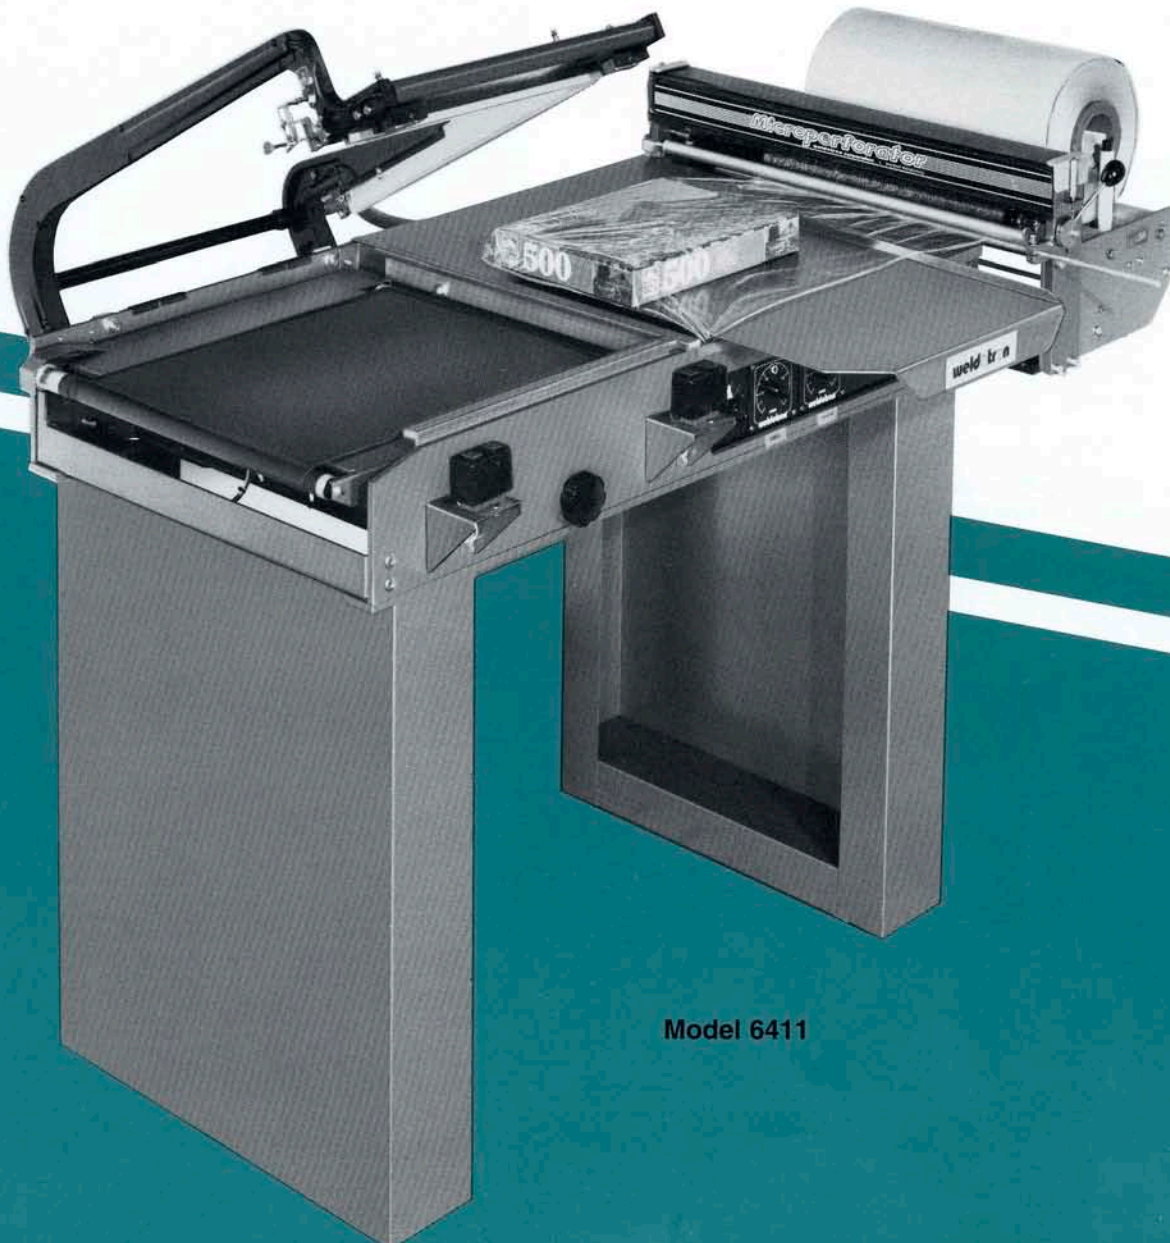


weldotron®**SEMI AUTOMATIC L-SEALERS WITH MAGNALOK™ SEALING
& POWER DISCHARGE CONVEYOR**

The Weldotron 6400 series is a group of newly redesigned semi automatic L-sealers based on our classic models that have been popular for many years. The new 6400 series combines Magnalok™ seal bar clamping with an automatic package discharge conveyor. With sealing head hold-down and product take-away automatically controlled, the operator is free to load a new package while the preceding one is being sealed.

Newly added standard features include a surface film unwind with auto film breaking and seal bar film clamps. 6400 series sealers can be optionally equipped with our new universal film micro-perforator. The microperforator ensures smoother, more uniform shrink at significantly lower tunnel temperatures. The end result is a noticeable improvement in package appearance and a reduction in energy costs.

**Model 6411**

6400 SERIES FEATURES:

- Magnalok™ Seal Bar Clamping
- Powered Package Discharge Conveyor
- Surface Film Unwind
- Ease To Operate
- Handles All Types Of Shrink Films
- Adjustable Heat Control
- Automatic Seal Temperature Compensator
- Automatic Cycle Timing
- Quick-Adjust Sealing Platform
- Heavy Duty Construction
- "Steel-It" USDA Approved Epoxy Paint Finish


OPTIONAL ACCESSORIES:

- Model 348-25 Film Microperforator (6411/6412)
- Model 348-25M Motorized Film Microperforator (6411/6412)
- Model 251B Vacuum Scrap Removal System (55 gallon)
- Model 252A Electric Hole Punch
- Model 328 Thermal Hole Burner
- Model 258-20 Caster Mounted Base (for 20" wide sealers)
- Model 220 "Whiteline" Finish For Food Applications
- USDA Stainless Steel Construction
- Spare Parts Kit


SPECIFICATIONS:

Model #	Seal Area W x L	Max.Film Width	Power		
			Volts	Amps	Ph.
6411	20" x 16"	22"	230	17	1
6412	20" x 28"	22"	230	23	1
*6461	20" x 16"	22"	230	17	1

* Note: 6461 . . . USDA Stainless Steel Construction
Specifications subject to change without notice.

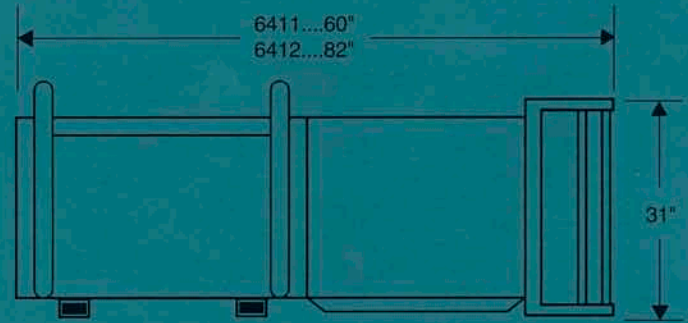

Top View

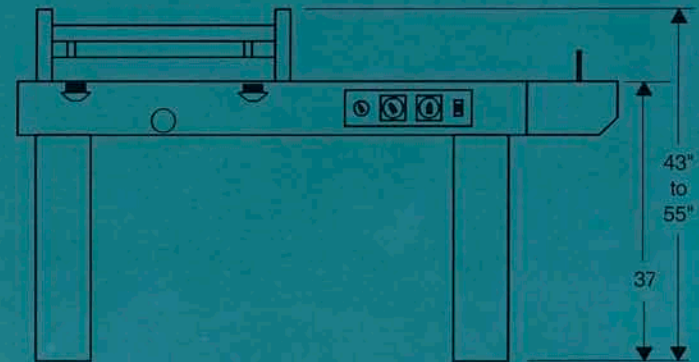

Side View